

Fuel Pulse Damper, FPD110x



Part # 122-01-211 / 122-01-212 / 122-01-213

FPD110x Assembly / Spare parts list

© Nuke Performance AB 2026 | For more information about specifications, visit our product page on our website www.nukeperformance.com.

NO.	Spare part #	Description
1	N/A	1 x FPD110x top housing
2	300-10-138	4 x MC6S M4x8 stainless steel bolts
3	1220-00-011	1 x M5 to 5mm Male Adapter, 1mm Orifice
4	1220-10-002	1 x K6S M5x6 stainless steel block-off bolt
5	N/A	1 x FPD110x stainless steel spring
6	122-10-002	1 x FPD Diaphragm
7	N/A	1 x FPD bottom housing
8	N/A	1 x Stainless steel lock pin
9	N/A	1 x AN-6 ORB / AN-8 ORB / 3/8 NPT bolt *
10	700-20-102	1 x AN-6 ORB O-ring, Viton *
	700-20-103	1 x AN-8 ORB O-ring, Viton *

* Included bolt and O-ring vary by Fuel Pulse Damper version. The NPT version does not include an O-ring.

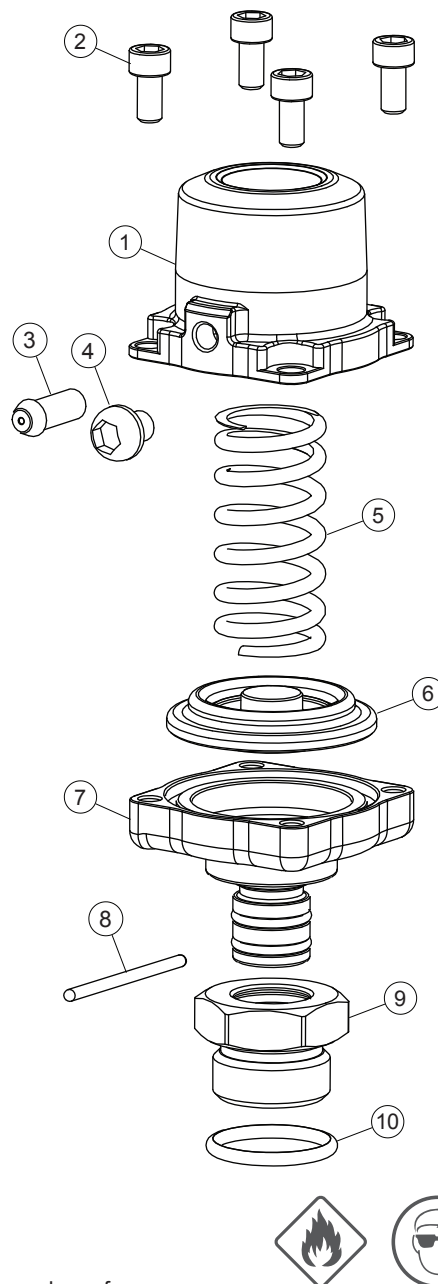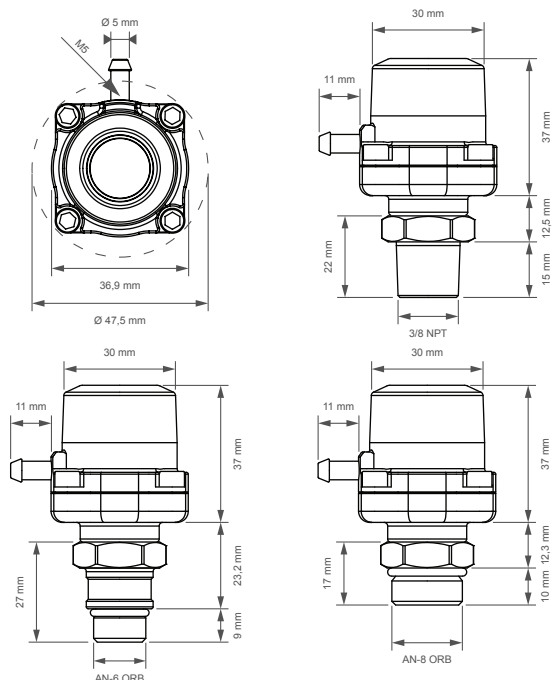

Fuel Pulse Damper FPD110x, AN-6 specifications

For more information about specifications, visit our product page on our website www.nukeperformance.com.

Connection thread	AN-6 ORB	Height (mounted)	50.1mm (1.97")
Base fuel pressure range	2.75 - 7.58 BAR (40-110 PSI)	Width/Cross section	37.0/46.8mm (1.45/1.84")
Vacuum/Boost port	M5 (M5 to 5mm barb connection included)	Weight	99.0g (3.48oz)
Fuel compatibility	Gasoline, Petrol, Methanol, Ethanol, E85	For motorsports use	YES, only for motorsports use
Swivel functionality	YES, 360 degree rotation	AN-6 Part # / EAN	122-01-211 / 7340209512182

Fuel Pulse Damper FPD110x, AN-8 specifications

For more information about specifications, visit our product page on our website www.nukeperformance.com.

Connection thread	AN-8 ORB	Height (mounted)	49.3mm (1.94")
Base fuel pressure range	2.75 - 7.58 BAR (40-110 PSI)	Width/Cross section	37.0/46.8mm (1.45/1.84")
Vacuum/Boost port	M5 (M5 to 5mm barb connection included)	Weight	96.0g (3.38oz)
Fuel compatibility	Gasoline, Petrol, Methanol, Ethanol, E85	For motorsports use	YES, only for motorsports use
Swivel functionality	YES, 360 degree rotation	AN-6 Part # / EAN	122-01-212 / 7340209512189

Fuel Pulse Damper FPD110x, 3/8 NPT specifications

For more information about specifications, visit our product page on our website www.nukeperformance.com.

Connection thread	3/8 NPT	Height (mounted)	50.3-55.0mm (1.98-2.16")*
Base fuel pressure range	2.75 - 7.58 BAR (40-110 PSI)	Width/Cross section	37.0/46.8mm (1.45/1.84")
Vacuum/Boost port	M5 (M5 to 5mm barb connection included)	Weight	108.0g (3.80oz)
Fuel compatibility	Gasoline, Petrol, Methanol, Ethanol, E85	For motorsports use	YES, only for motorsports use
Swivel functionality	YES, 360 degree rotation	AN-6 Part # / EAN	122-01-213 / 7340209512205

* depending on the mounting depth of the thread



INCORRECT INSTALLATION CAN CAUSE SERIOUS DAMAGE TO THE PRODUCT AND VEHICLE. AS A RESULT, ACCIDENTS, PROPERTY DAMAGE, AND PERSONAL INJURY ARE POSSIBLE. INSTALLATION MAY ONLY BE CARRIED OUT BY EXPERTS. MAKE SURE TO ALWAYS USE ALL NECESSARY SAFETY EQUIPMENT. THE MANUFACTURER IS NOT LIABLE FOR DAMAGE CAUSED BY IMPROPER INSTALLATION.



Information:

Design combined with top quality performance.
For more information about the products and retailers visit www.nukeperformance.com

nuke
performance